


OVERVIEW

The SW-07 high power LED lighting module is one of our highest lumen output products with some modules capable of generating over 2100 lumens of light.

A by-product of light generation is heat. This heat is highly concentrated and must be removed from the module to ensure long life and reliability of the LEDs. This is normally accomplished by mounting the module onto a suitable heat sink and then confirming that the LEDs are being adequately cooled by monitoring the resistance of the Vishay NTC 10K [NTHS0805N02N1002J](#) thermistor that is mounted on every SW-07.

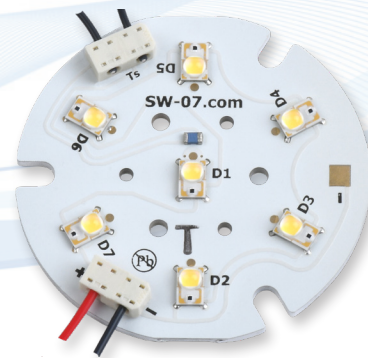

SCOPE

This document describes how to use the onboard thermistor to determine the LED junction temperature of an SW-07 LED module for in situ monitoring and foldback temperature control circuits. It does not replace the need to confirm that individual LEDs are being adequately cooled by using the procedure described in the [SW-07 datasheet](#).

Measuring LED Temperature:

To ensure long life and reliability it is important that the LED junction temperature is never allowed to exceed the maximum temperature rating specified in the LED datasheet.

As the LED junction is buried inside the LED body, it is not possible to directly measure the junction temperature unless you have access to some very specialized equipment. However you can calculate the junction temperature with a reasonable degree of accuracy by measuring the temperature close to the LED and then use this simple formula:

$$T_J = T_S + \Psi_{J-S} * PD$$

Where:

T_J = Junction Temperature of the LED

T_S = The measured temperature close to the LED

Ψ_{J-S} = The total thermal resistance from the LED junction to the thermistor ($R_{\theta J-C} + R_{\theta C-S}$)

PD = The total power dissipation (in watts) of LED1 on the SW-07 module

Thermal Model:

Image 1 is a cross section of a typical SABER² LED module that illustrates how the LED is attached to the SABER² base and shows the thermal paths between the LED junction, thermistor and bottom of the LED module.

- $R\theta_{J-C}$ is the thermal resistance from the LED junction (T_j) to the LED thermal pad
- $R\theta_{C-S}$ is the thermal resistance from the LED thermal pad to the thermistor
- $R\theta_{C-B}$ is the thermal resistance from the LED thermal pad to the bottom of the SABER² module


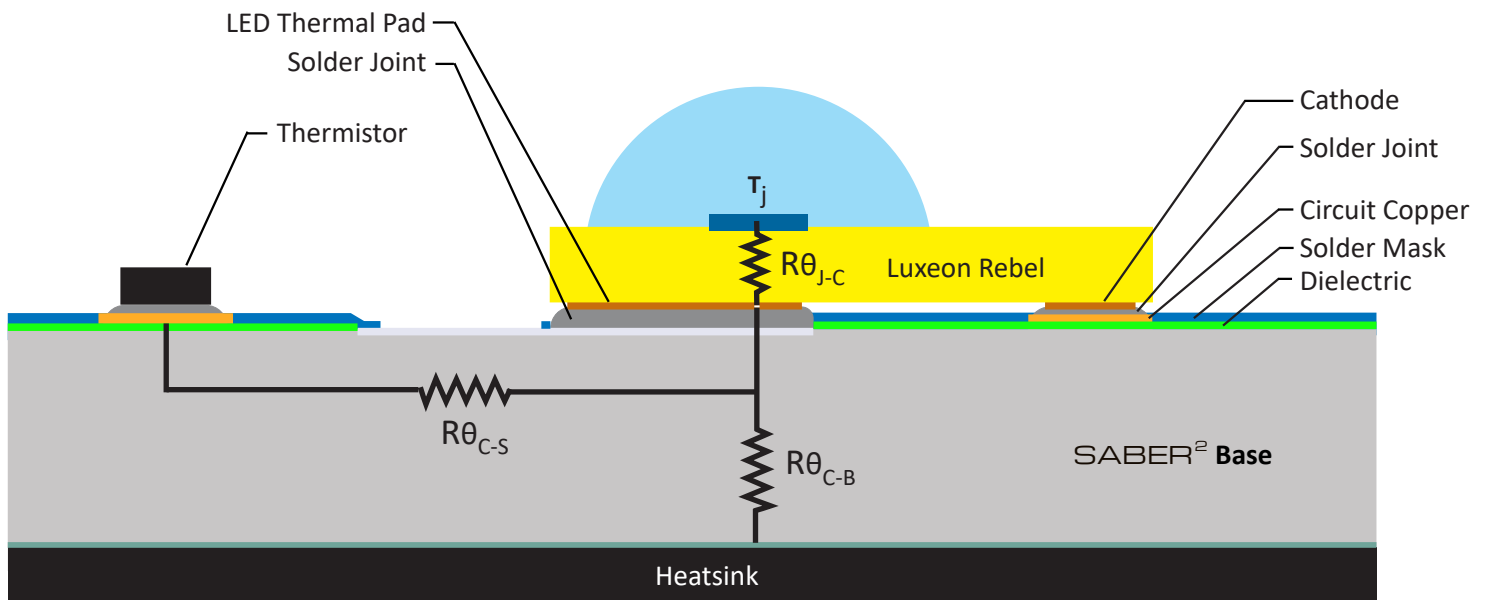


Image 1

Determining the T_S temperature is a simple matter of measuring the resistance of the thermistor that is mounted to the SW-07 board using a DMM (Image 2) and then using table 1 on pages 5 & 6 of this document to determine the actual temperature in °C.

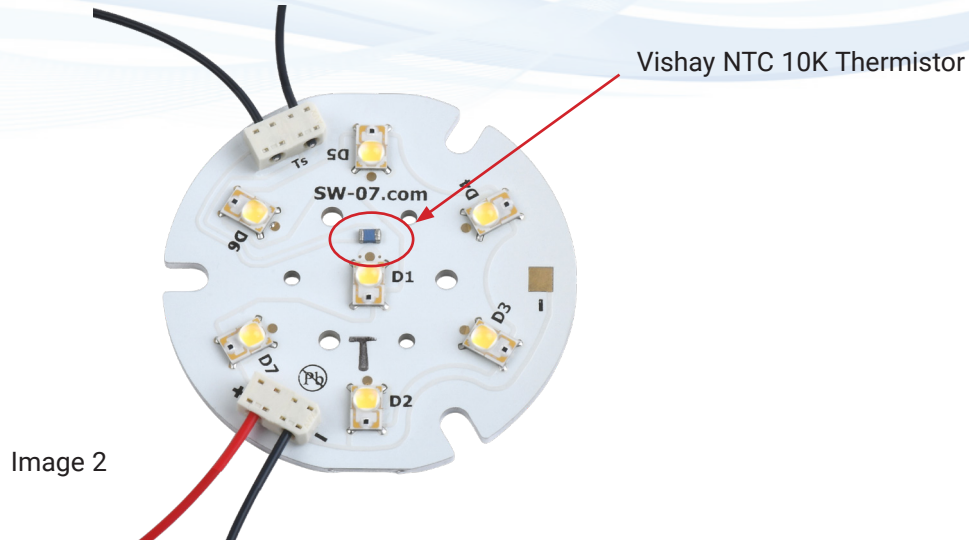


The $R_{\theta_{J-C}}$ value can be found in the datasheet for each LED. It will usually be listed as the *Typical Thermal Resistance Junction To Thermal Pad* (°C/W) $R_{\theta_{J-C}}$

The $R_{\theta_{C-S}}$ value for all SW-07 assemblies is: **4°C/W**

The PD can be calculated by multiplying the LED drive current by the forward voltage (V_f) of LED D1. The LED forward voltage must be measured on the solder pads of D1 (center LED) after the LED has reached it's stabilized operating temperature. (Image 3)

Measure the voltage drop across the LEDs while powered and operating at their stabilized temperature.

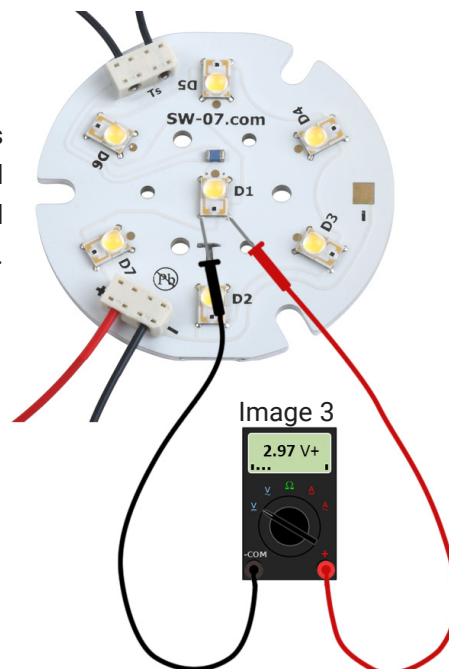

An Example:

Lets assume you are powering a SW-07-N4 (Neutral White LXML-PWN2 LEDs) at 700mA.

According to the datasheet, these LEDs have a $R_{\theta J-S}$ of 6 °C/W. After allowing the module to stabilize to its normal operating temperature you measure the resistance of the thermistor and find it to be 2950 R. The voltage drop across the LED is measured at 2.97 Vf.

With this information we can then determine that the actual LED junction temperature is about 80.8 °C.

$$60 + 10 * 2.079 = 80.8^{\circ}\text{C}$$

Where:

$$T_S = 60 \text{ (2950 R = 60 }^{\circ}\text{C - always select the next highest value from the table)}$$

$$R_{\theta J-C} = 6$$

$$R_{\theta C-S} = 4$$

$$\Psi_{J-S} = 10 (6 + 4)$$

$$PD = 2.079 (0.7 \times 2.97)$$

Recommendations:

While it is safe to operate the SW-07 modules up to the maximum junction temperature ratings provided in the datasheets for all Rebel LEDs, we recommend that you stay well below the maximum junction temperature to ensure maximum LED life.

You will find more information about LED life spans vs. LED junction temperature in the Lumileds Reliability Data (RD07) document [available for download from our website](#).

VISHAY NTC 10K THERMISTOR (NTHS0805N02N1002J)

Resistance/Temperature Conversion

Resistance Ω	Temp $^{\circ}\text{C}$	Resistance Ω	Temp $^{\circ}\text{C}$	Resistance Ω	Temp $^{\circ}\text{C}$
33,740	-4	4,370	48	969	99
32,230	-3	4,225	49	945	100
30,810	-2	4,086	50	921	101
29,450	-1	3,953	51	898	102
28,160	0	3,824	52	875	103
26,920	1	3,700	53	853	104
25,760	2	3,581	54	832	105
24,650	3	3,467	55	811	106
23,600	4	3,356	56	792	107
22,600	5	3,250	57	772	108
20,740	7	3,147	58	753	109
19,870	8	3,049	59	735	110
19,050	9	2,954	60	717	111
18,270	10	2,862	61	700	112
17,510	11	2,774	62	683	113
16,800	12	2,689	63	667	114
16,120	13	2,607	64	651	115
15,470	14	2,528	65	636	116
14,850	15	2,451	66	621	117
14,260	16	2,378	67	607	118
13,700	17	2,306	68	593	119
13,160	18	2,238	69	579	120
12,640	19	2,172	70	566	121
12,160	20	2,108	71	553	122
11,680	21	2,046	72	540	123
11,230	22	1,986	73	528	124
10,800	23	1,929	74	516	125
10,390	24	1,873	75	504	126
10,000	25	1,820	76	493	127
9,624	26	1,768	77	482	128
9,265	27	1,717	78	471	129
8,921	28	1,669	79	461	130
8,591	29	1,622	80	451	131
8,276	30	1,577	81	441	132
7,973	31	1,533	82	431	133
7,684	32	1,490	83	422	134
7,406	33	1,449	84	413	135
7,140	34	1,410	85	404	136
6,885	35	1,371	86	395	137
6,641	36	1,334	87	387	138
6,406	37	1,298	88	379	139

Continued ...

Table 1

... Table 2 Continued

Resistance Ω	Temp $^{\circ}\text{C}$	Resistance Ω	Temp $^{\circ}\text{C}$	Resistance Ω	Temp $^{\circ}\text{C}$
6,181	38	1,263	89	371	140
5,965	39	1,229	90	363	141
5,758	40	1,197	91	355	142
5,559	41	1,165	92	348	143
5,368	42	1,134	93	341	144
5,185	43	1,105	94	334	145
5,008	44	1,076	95	327	146
4,839	45	1,048	96	320	147
4,676	46	1,021	97	314	148
4,520	47	995	98	307	149
				301	150

SAFETY:

The LED mounted onto this module will produce a highly intense point of light. Do not stare directly at the LED for any length of time.

RESTRICTED USE:

Products produced or sold by Quadica Developments Inc. are not certified for use as critical components in life support devices, systems, nor in medical operating rooms or life rescue equipment. A critical component is any component of a life support device, system or medical/rescue equipment whose failure to perform can be reasonably expected to cause failure or malfunction of the life support device, system, or medical operating room/life rescue equipment.

DISCLAIMER:

Although QUADICA DEVELOPMENTS INC. has attempted to provide the most accurate information and services data (hereinafter "Data"), the Data is provided "as is" and may contain errors. The entire risk of use of the data shall be with the user. QUADICA DEVELOPMENTS INC. makes no warranty, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose regarding the contents or correctness of the Data provided or the ability of the Data to meet the user's needs or expectations. QUADICA DEVELOPMENTS INC. reserves the right to make changes and corrections without notice.

You, as the user, agree to this disclaimer and the user agreement with the download or use of the provided Data. In no event shall QUADICA DEVELOPMENTS INC. be liable for any direct, indirect, special, incidental, exemplary, or consequential damages arising out of or related to the use of the Data, however caused, regardless of theory of liability, and whether or not QUADICA DEVELOPMENTS INC. has been advised of the possibility of such damage. This limitation shall apply notwithstanding any failure of essential purpose or any exclusive remedy.